


MOTORIZED HONEYCOMB BLINDS



Structure Drawing

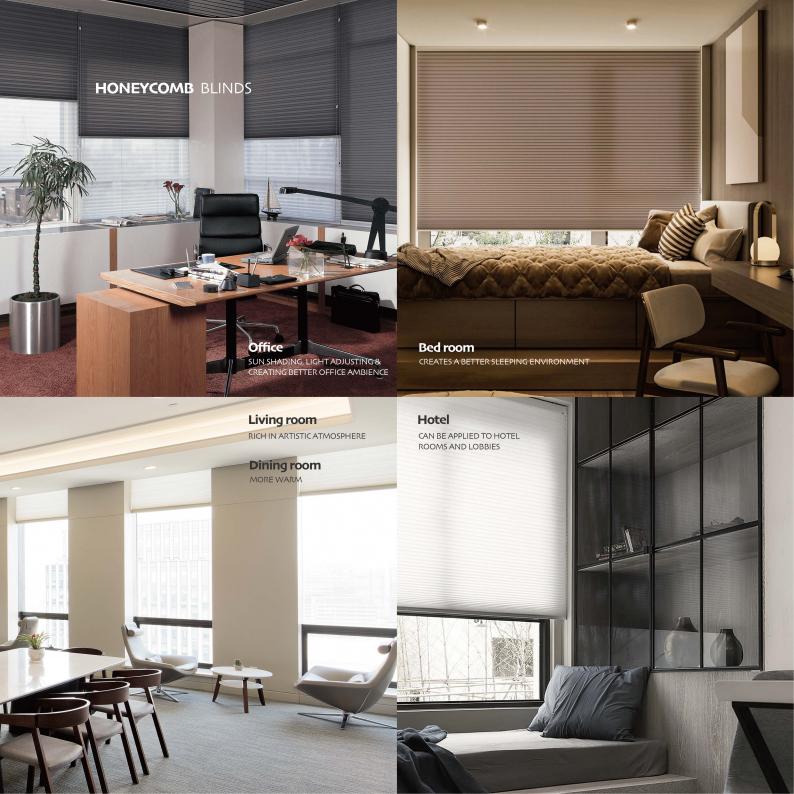

9. Bottom rail

1. Caps

5. Motor bracket

2. Reel

6. Top track

3. Transmisson rod

7. Fabric

4. Motor

8. Bottom rail caps

Components List(38/45mm)

Motor		Rated torque:o.8Nm Rated speed: 34rpm Rated current:o.83A Rated power:10W Degree of Protection:IP20
Fabric		Size:38/45mm Material: Polyester 100% Color: White There are more colors available, please contact customer service for all electronic and physical color cards.
Top track		Size: 56x51mm Material: Aluminum Thickness: 1.2mm Color: White Color could be customized (MOQ:500pcs)
Reel		Size: 40x38x125mm Material: POM Color: White
Caps		Size: 60x52mm Material: POM Color: White Match with top cover
Motor bracket	00	Size: 45x4ox5mm Material: Nolon Color:Black
Transmisson rod		Size:4x4mm Material:Aluminum Color:Aolly
Bottom rail		Size: 50x12mm Material: Aluminum Colour: Optional Thickness: 1.0mm Heavy Duty Bottom rails
Bottom rail caps		Size: 50x12mm Material: POM Colour: Clear
Bracket	Party of the same	Size: 73x30x37mm(L x W x H) Material: 304 Steel + POM Spring Insert Clip fix andeasy mounting Perfect privacy after mounting
Expansion screws	 	Size:M6x3omm

Components List(25mm)

Motor		Rated torque:o.8Nm Rated speed: 34rpm Rated current:o.83A Rated power:10W Degree of Protection:IP20
Fabric		Size:25mm Material: Polyester 100% Color: White There are more colors available, please contact customer service for all electronic and physical color cards.
Top track		Size: 33x37mm Material: Aluminum Thickness: 1.2mm Color: Grey Color could be customized (MOQ:500pcs)
Reel		Size: 23x30x121mm Material: POM Color: White
Caps		Size: 35x39mm Material: POM Color: Grey Match with top cover
Transmisson rod		Size:4x4mm Material:Aluminum Color:Aolly
Bottom rail		Size: 30x13mm Material: Aluminum Colour: Optional Thickness: 1.0mm Heavy Duty Bottom rails
Bottom rail caps	1	Size: 30x13mm Material: POM Colour: Clear
Bracket	The same of the sa	Size: 73x30x37mm(L × W × H) Material: 304 Steel + POM Spring Insert Clip fix andeasy mounting Perfect privacy after mounting
Expansion screws	# 	Size:M6x3omm

Measuring method

Installation of honeycomb blinds have two methods: inside mount & outside mount.

Measuring method for Inside mount:


Horizontal direction (Width) measure inside of window: top, middle and bottom three points (as below pics in orange line show) Vertical direction (Height) measure inside of window: left and right side (as below pic in orange line show)

The sizes for window's width & height choose the minimum ones as the window size. For width of ready made blinds, advise to deduct 5-10mm for tolerance.

Measure method for Outside mount:

Horizontal direction (Width) measure inside of window: top, middle and bottom three points (as below pics in grey line show) Vertical direction (Height) measure inside of window: left and right side (as below pic in grey line show)

The sizes for window's width & height choose the maximum ones as the window size. For width of ready made blinds, advise to add 100mm for Window's width& height to make sure blinds total cover the window frame.

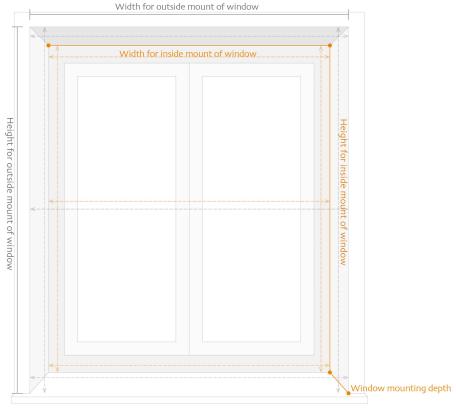

Window mounting depth≥10cm

Installation Type





Inside mount

How to determine the installation type?



INSIDE MOUNT /OUTSIDE MOUNT



Inside open window

OUTSIDE MOUNT



INSIDE MOUNT /OUTSIDE MOUNT

Package types

Inner packing



Clear PVC Box



Outer Packing



5 layers thicken carton + angle protection for 4 edges

Packing Real Site

















Tianjin Hunters Technology Co., Ltd

- No.6 building, Changqingteng Art & Industrial Park, No.10 Caizhi Road, Jingwu town, Xiqing District, Tianjin, China. Post code: 300392
- **(** +86 22 23982209
- +86 15922294041
- ▼ lauraoo1@aliyun.com