

SHANGRI-LA BLINDS

DESIGN BY HUNTERS



SHANGRI-LA BLINDS


Office

SUN SHADING, LIGHT ADJUSTING &
CREATING BETTER OFFICE AMBIENCE



Bed room

CREATES A BETTER SLEEPING ENVIRONMENT



Living room

RICH IN ARTISTIC ATMOSPHERE

Dining room

MORE WARM



Hotel

CAN BE APPLIED TO HOTEL
ROOMS AND LOBBIES










Structure Drawing



- 1. Caps
- 2. Motor
- 3. Tube
- 4. Top track

- 5. Fabric
- 6. Bottom rail caps
- 7. Bottom rail

Components List

Motor		<p>Rated torque:1.1Nm Rated speed: 28rpm Rated current:0.83A Rated power:10W Degree of Protection:IP20</p>
Fabric		<p>Size: 60/65/75mm Material: Polyester 100% Color: White/Grey/Beige/Matt black</p> <p>There are more colors available, please contact customer service for all electronic and physical color cards.</p>
Top track		<p>Size: 73x73mm Material: Aluminum Thickness: 1.2mm Color: White/Grey/Beige/Matt black Color could be customized (MOQ:500pcs)</p>
Caps		<p>Size: 75x75mm Material: POM Color: White/Grey/Beige/Matt black Match with top cover</p>
Tube		<p>Size:Ø38 Material:Aluminum Thickness: 1.2mm Color:white Powder coated Matched Color Technology</p>
Bottom rail		<p>Size: 54x8mm Material: Aluminum Colour: Optional Thickness: 1.0mm Heavy Duty Bottom rails</p>
Bottom rail caps		<p>Size: 54x8mm Material: POM Colour: White</p>
Bracket		<p>Size: 73x30x37mm(L x W x H) Material: 304 Steel + POM Spring Insert Clip fix and easy mounting Perfect privacy after mounting</p>
Expansion screws		<p>Size:M6x30mm</p>

Measuring method

Installation of Shangri-la blinds have two methods: inside mount & outside mount.

Measuring method for Inside mount:

Horizontal direction (Width) measure inside of window: top, middle and bottom three points (as below pics in Orange line show)

Vertical direction (Height) measure inside of window: left and right side (as below pic in grey line show)


The sizes for window's width & height **choose the minimum ones** as the window size. **For width of ready made blinds, advise to deduct 5-10mm for tolerance.**

Measure method for Outside mount:

Horizontal direction (Width) measure inside of window: top, middle and bottom three points (as below pics in Orange line show)

Vertical direction (Height) measure inside of window: left and right side (as below pic in grey line show)


The sizes for window's width & height **choose the maximum ones** as the window size. **For width of ready made blinds, advise to add 100mm for Window's width& height to make sure blinds total cover the window frame.**

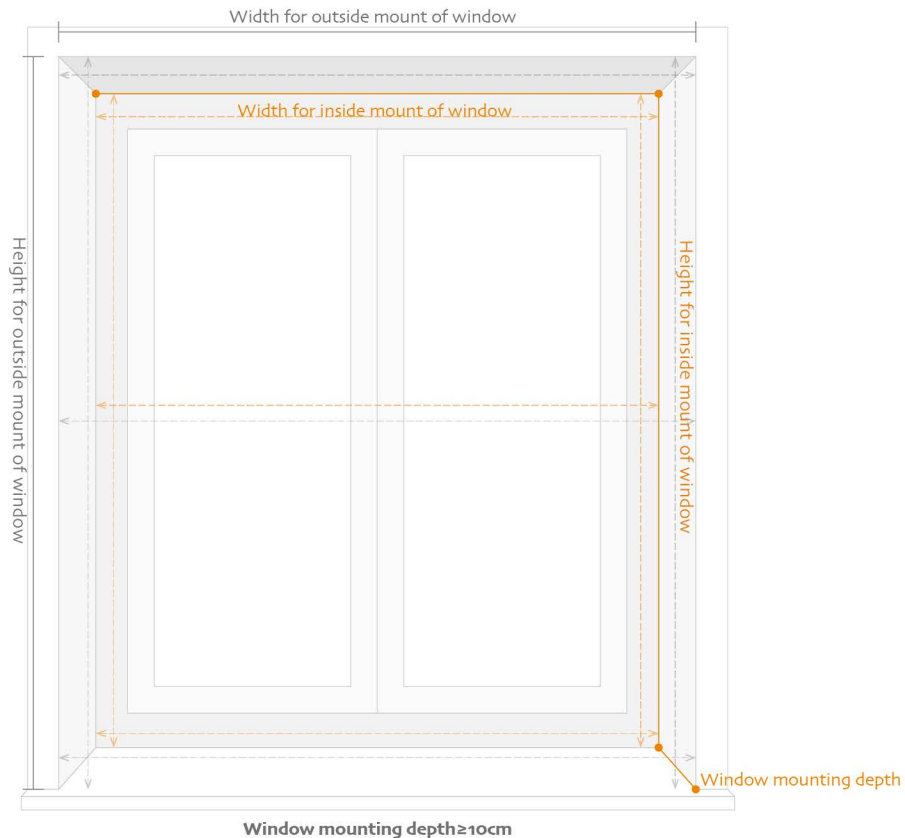

Installation Type




Inside mount

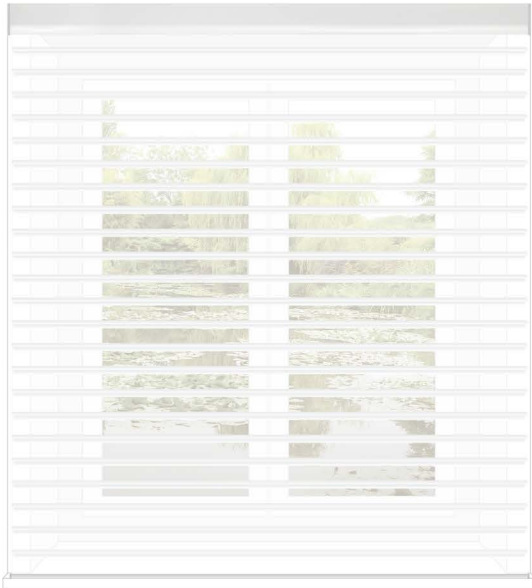


Outside mount


How to determine the installation type?



Sliding window
INSIDE MOUNT
/OUTSIDE MOUNT

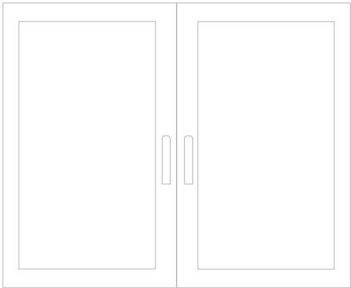

Inside open window
OUTSIDE MOUNT

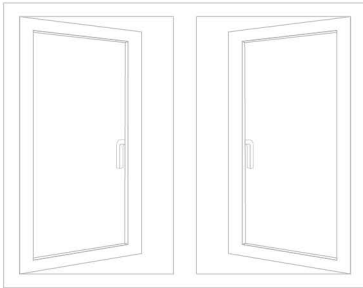

Outside open window
INSIDE MOUNT
/OUTSIDE MOUNT

Package types

Inner packing



Clear PVC Box



Air bubble wrap

Outer Packing



5 layers thicken carton + angle protection for 4 edges

Packing Real Site





Tianjin Hunters Technology Co., Ltd

📍 No.6 building, Changqingteng Art & Industrial Park, No.10 Caizhi Road,
Jingwu town, Xiqing District, Tianjin, China. Post code: 300392

☎ +86 22 23982209

☎ +86 15922294041

✉ laura001@aliyun.com

Price list (Motorized Shangri-la Roller Blinds)

Item	Model	Technical Specification	Unit	EXW Price	Note
1	DM25LEU/S series (Including Remotes)	Rated torque:1.1Nm Rated speed: 28rpm Rated current:0.83A Rated power:10W Degree of Protection:IP20 Running time:>6min Working temperature:0~40 c°	Set	218.00	Advised area within 4m ²
2	DM35LEU/S series (Including Remotes)	Rated torque:1.1Nm Rated speed: 28rpm Rated current:0.83A Rated power:10W Degree of Protection:IP20 Running time:>6min Working temperature:0~40 c°	Set	218.00	Advised area within 7m ²
3	DM25 series (Including Remotes)	Rated torque:1.5Nm Power:110-240V Rated current:0.19A Rated power:12W Degree of Protection:IP20 Running time:>6min Working temperature:0~40 c°	Set	218.00	Advised area within 4m ²
4	DM35 series (Including Remotes)	Rated torque:6Nm Power:230V Rated current:0.67A Rated power:155W Degree of Protection:IP44 Running time:>4min Working temperature:-10~50 c°	Set	218.00	Advised area within 7m ²
5	DM28CEQ/S series (Including Remotes)	Rated torque:2Nm Rated speed: 28rpm Rated current:1.10A Rated power:13W Degree of Protection:IP20 Running time:>6min Working temperature:0~40 c°	Set	218.00	
6	DM25TE series	Rated torque:1.5Nm Rated speed: 28rpm Power:110-240V Rated current:0.3A Running time:≥12min Degree of Protection:IP20	Pcs	450.00	
7	Tuya/Zigbee Controller	Power:3.3V Size:27x16x67mm Rated current:≤300mA Working temperature:-10~55 c°	Pcs	150.00	

Note: 1、 Above system are for matched color Aluminum alloy Material. Quality Matt standard Top cover & Matt bottom rail.

2、 Above price is for Motorized system price (Excluding fabric & parts price) need add these price separately as different choice. Fabric & part price is per square meter. If less than 1m², then price as 1m². Then add motorized system price per set.